BLASTRAC

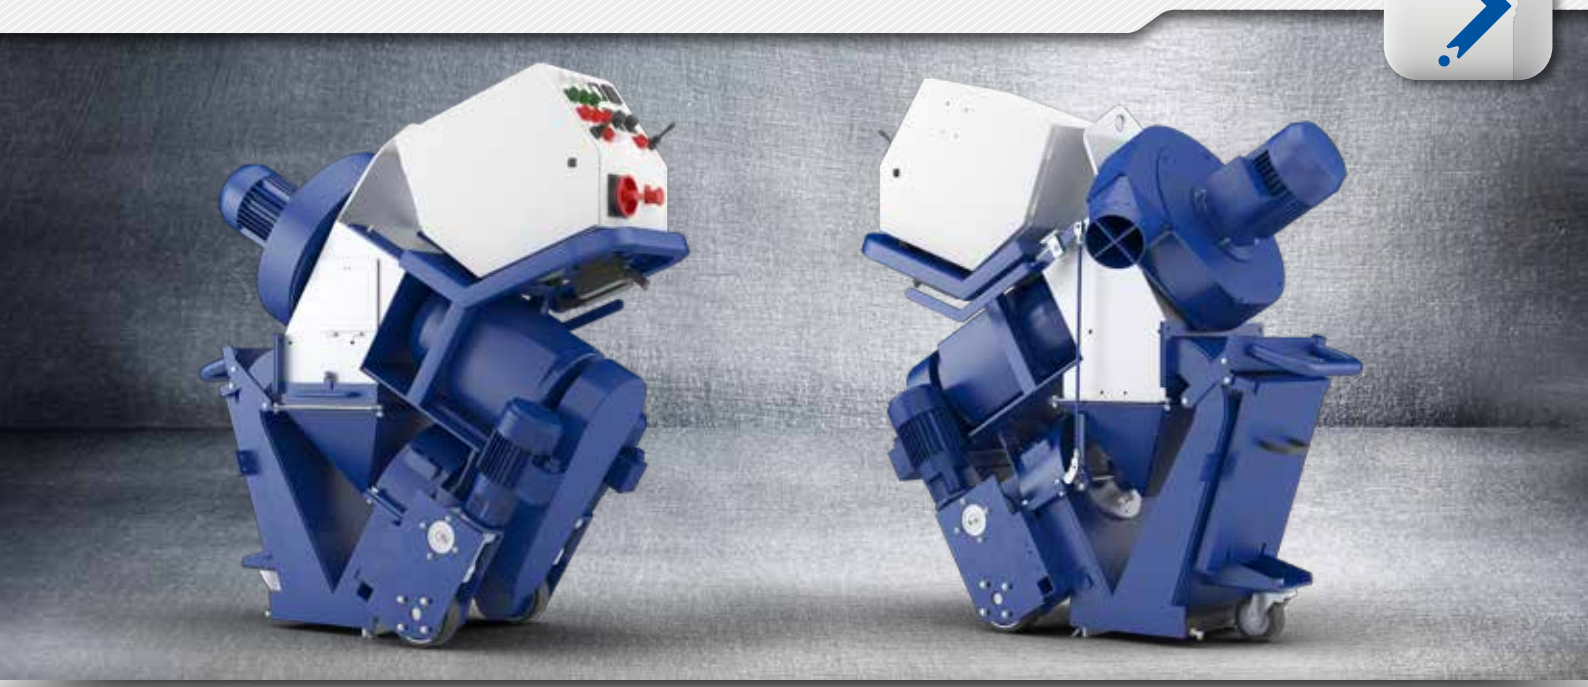

350E STEEL BLASTER

A STEEL BLASTER WITH A WORKING WIDTH OF 350 MM

The Blastrac 350E steel shot blaster is perfect for small and medium-sized jobs. Its modular construction allows for it to be easily disassembled and reassembled through a space of 600 mm.

The 350E steel blast-cleaning machine is especially designed to be used on internal tank bottoms or tank roofs and can equally be used on ship decks, steel plates, oil platform helicopter decks and walkways, bridge decks, navy ship decks and steel floors. Blastrac has designed a full range of dust collectors, consumables and optional items which give the opportunity to process any specific application.

- 350 MM
- UP TO 38 M²/H ON STEEL (SA 2,5)
  ELECTRIC / 1 - 15 M/MIN
- 1350 MM | 650 MM | 1100 MM
- FORWARD (PUSH)
- 430 KG
- 0,2 – 0,5 KG/M²
- 11 KW | 400 V | 50/60 HZ | 32 A | THREE PHASE | 5 POLE
- SURFACE: STEEL

USER FRIENDLY
All our steel blasters have a user friendly control panel which makes it easy to operate the machine. Every steel blaster comes with extra safety features.

STEEL ABRASIVES
Depending on the material you want to remove and the result you want to achieve, you can choose different types of abrasives, all are available at Blastrac.

ELECTRIC OR HYDRAULIC
Depending on the type of project and application, you can choose a steel blaster with an electrical or hydraulic drive system. Ask us for advice!

MODULAR CONSTRUCTION
Blastrac horizontal steel blasters can be disassembled into only a few parts. This allows for the machine to be passed through a Ø600 mm storage tank access hatch.

CLOSED CIRCUIT
Every Blastrac steel blaster should be connected to a Blastrac industrial dust collector. This means that you are able to work dust free, creating a safe working environment.

GREEN TECHNOLOGY
Our steel blasters, like any other Blastrac machine, do not use any chemicals or waste valuable drinking water.

BLASTRAC

350E STEEL BLASTER OPTIONS

BDC-66
DUST COLLECTOR

999-0390 / 999-0460
999-0016 / 999-0025
ABRASIVE
S390 / S460 / SG16 / SG25

492019
SUCTION HOSE Ø127 MM
(MINIMUM 15 M)

CABLE COIL