

Gas Airless SprayersThe Industry Leader in Innovation, Power and Performance.



Gas Airless Sprayers



Unmatched Power and Performance in Gas Airless Sprayers



GMAX™ 3400

GMAX II 3900

GMAX II 5900

GMAX II 5900 Convertible

GMAX II 7900

IronMan 500G

GH™ 130 Convertible

GH 200 Convertible

GH 230 Convertible

GH 300

GH 733 & Roof Rigs™

GH 833 Big Rig™



"We only use Graco sprayers and would never think of using any unit that isn't blue."

- Mike Smith -

Swanson & Youngdale Painting Minneapolis, MN

Only Graco delivers the industry's first choice for gas airless sprayers, backed by a solid reputation for proven quality, maximum performance, reliable warranty coverage and unmatched on-the-job productivity. Graco sprayers are designed to exceed the professional painting contractor's standards for quality and performance.



We Stand Behind the Quality Built Into Every Product



Proven Quality

- Precision design, 100% factory-tested, and field-proven.
- Consistent improvements on cutting-edge technology keep Graco sprayers running on the job for years.

Maximum Performance

- Higher output with superior control ensures highest quality finish for every job.
- Rely on any of these high performance sprayers to deliver the results you expect from a Graco.

Longest Warranty

- Every Graco gas sprayer is backed by our full warranty coverage and more than 80 years of proven commitment to the professional contractor.
- Sprayers so reliable you may never need to use the warranty.

Unmatched Productivity

- Industry leading features make transport, set-up, operation and clean-up simple and less time-consuming.
- Exclusive Endurance™ Pumps deliver long life, reliable performance, and consistent spraying.
- The Endurance Advantage[™] Program eliminates downtime by keeping a spare pump on hand for a quick change-out on the job.

1



 DESCRIPTION
 PART NUMBER
 MAX TIP SIZE
 MAX GPM (LPM)
 MAX PSI (BAR)

 GMAX 3400 Hi-Boy Complete
 248664
 0.027
 .75 (2.8)
 3300 (227)

 GMAX 3400 Lo-Boy Complete
 248666
 0.027
 .75 (2.8)
 3300 (227)

All units include: New Contractor™ Gun, 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax™ll Hose, RAC® X 517 Tip and Guard, Whip Hose.



Single-stage gear drive provides increased performance with less weight.



Electronic Pressure Control provides high quality spray pattern.



Inlet tube removes by hand for easy clean up.

The GMAX 3400 is the perfect sprayer for the entry-level contractor who is looking for maximum power in a light weight portable package.

Exclusive Endurance™ Pump

- Long-life V-Max Blue™ Packings, Chromex Rod and case hardened cylinder
- QuikAccess™ intake valve to easily clean or clear debris

Honda® Power

- 120 cc to deliver maximum performance
- Contractor preferred engine with Oil Alert

Light Weight Design

- Graco's lightest professional gas sprayer at only 89 lbs (40.4 kg)
- Easy to load and unload on job sites

Single-Stage Gear Drive System

- · Quiet running gear system
- Long life drive system prevents down time
- · Light weight design
- Fewer parts to maintain, less service requirements

Electronic Pressure Control System

- Consistent spray with all materials
- Excellent spray pattern provides a high quality finish

Chrome Plated, Welded Steel Cart

- Rugged welded steel construction
- Integrated hose rack with retractable handle
- Lift handles offer convenient grab points
- Tubed pneumatic wheels roll easily on all surfaces

Easy Out™ Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out

 so filters won't get stuck or
 collapse when dirty
- · Filter removes with the cap for less mess

The GMAX II 3900 is the perfect sprayer for the professional contractor who is working on new residential construction job sites.

Proven Endurance Pump

- Exclusive ProConnect™ system allows quick change-out of pumps – no tools required
- Long-life V-Max Blue Packings, Chromex Rod, and Hardened Stainless Steel cylinder
- QuikAccess intake valve to easily clean or clear debris

Honda Power

- 120 cc to deliver maximum performance
- Contractor preferred engine with Oil Alert

SmartControl Pressure Control

- Advanced microprocessor control delivers Graco's most consistent spray fan at all spraying pressures
 - WatchDog™ system automatically shuts off sprayer when bucket is empty to prevent damage

Exclusive Advantage Drive™ System

- Time-tested drive system provides peace of mind
- Lifetime guarantee
- · Hardened helical gears are quiet running
- · Auto adjust/alignment system

Chrome Plated, Welded Steel Cart

- Rugged welded steel construction
- Integrated hose rack with retractable handle
- · Lift handles offer convenient grab points
- Tubed pneumatic wheels roll easily on all surfaces

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out so filters won't get stuck or collapse when dirty
 - Filter removes with the cap for less mess



GMAX II 3900



DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX GPM (LPM)	MAX PSI (BAR)
GMAX II 3900 Hi-Boy Standard	248684	0.036	1.25 (4.7)	3300 (227)
GMAX II 3900 Hi-Boy Premium*	248686	0.036	1.25 (4.7)	3300 (227)
GMAX II 3900 Lo-Boy Standard	248683	0.036	1.25 (4.7)	3300 (227)
GMAX II 3900 Lo-Boy Premium*	248685	0.036	1.25 (4.7)	3300 (227)

All units include: New Contractor Gun, 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Hose, RAC X 517 Tip and Guard, Whip Hose. *Premium units include: AutoClean2, Digital Display and Toolbox.



Exclusive Endurance Advantage Program eliminates downtime.



SmartControl provides high quality spray pattern plus the WatchDog Pump Protection System.



Exclusive ProConnect System – no-tools removal and installation for fast repairs on the job.



All units include: New Contractor Gun, 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Hose, RAC X 517 Tip and Guard, Whip Hose . *Premium units include: AutoClean2, Digital Display and Toolbox.



Exclusive Endurance Advantage Program eliminates downtime.



SmartControl provides high quality spray pattern plus the WatchDog Pump Protection System.



Exclusive ProConnect System – no-tools removal and installation for fast repairs on the iob.

The GMAX II 5900 is the most demanded sprayer for the professional contractor spraying new residential/commercial jobs – who knows what it takes to get the job done right, the first time.

Proven Endurance Pump

- Exclusive ProConnect system allows quick change-out of pumps – no tools required
- Long-life V-Max Blue Packings, Chromex Rod, and Hardened Stainless Steel cylinder
- QuikAccess intake valve to easily clean or clear debris

Honda Power

- 160 cc to deliver maximum performance
- Contractor preferred engine with Oil Alert

SmartControl Pressure Control

- Advanced microprocessor control delivers Graco's most consistent spray fan at all spraying pressures
- WatchDog system automatically shuts off sprayer when bucket is empty to prevent damage

Exclusive Advantage Drive™ System

- Time-tested drive system provides peace of mind
- Lifetime guarantee
- Hardened helical gears are guiet running
- Auto adjust/alignment system

Chrome Plated, Welded Steel Cart

- Rugged welded steel construction
- Integrated hose rack with retractable handle
- Lift handles offer convenient grab points
- Tubed pneumatic wheels roll easily on all surfaces

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess



The GMAX II 5900 Convertible is the industry's best gas/electric sprayer for the contractor who demands indoor/outdoor flexibility to get the job done.

Proven Endurance Pump

- Exclusive ProConnect system allows quick change-out of pumps – no tools required
- Long-life V-Max Blue Packings, Chromex Rod, and Hardened Stainless Steel cylinder
- QuikAccess intake valve to easily clean or clear debris

Honda Power

- 160 cc to deliver maximum performance
- Contractor preferred engine with Oil Alert

SmartControl Pressure Control

- Advanced microprocessor control delivers Graco's most consistent spray fan at all spraying pressures
 - WatchDog system automatically shuts off sprayer when bucket is empty to prevent damage

Exclusive Advantage Drive System

- · Time-tested drive system provides peace of mind
- Lifetime quarantee
- · Hardened helical gears are quiet running
- · Auto adjust/alignment system

Convertible Power - Electric/Gas

- . No-tools change out system is easy to use
- · Self-tensioning belt for long life
- · Quiet, indoor use not a problem
- 2.0 hp TEFC DC Motor delivers the power

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out so filters won't get stuck or collapse when dirty
- · Filter removes with the cap for less mess

GMAX II 5900 Convertible



DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX GPM (LPM)	MAX PSI (BAR
GMAX II 5900 Hi-Boy Standard Convertible	248691	0.043	1.6 (6.0)	3300 (227)
GMAX II 5900 Hi-Boy Premium Convertible*	248692	0.043	1.6 (6.0)	3300 (227)
GMAX II 5900 Hi-Boy Standard Convertible w/Electric Motor Kit (Non CSA)	248693	0.043	1.6 (6.0)	3300 (227)
GMAX II 5900 Hi-Boy Standard Convertible w/CSA Electric Motor Kit	248694	0.043	1.6 (6.0)	3300 (227)
GMAX II 5900 Lo-Boy Standard Convertible	248695	0.043	1.6 (6.0)	3300 (227)
GMAX II 5900 Lo-Boy Premium Convertible*	248696	0.043	1.6 (6.0)	3300 (227)
GMAX II 5900 Hi-Boy Premium Convertible* w/Electric Motor Kit (Non CSA)	248889	0.043	1.6 (6.0)	3300 (227)
GMAX II 5900 Lo-Boy Standard Convertible w/Electric Motor Kit (Non CSA)	248697	0.043	1.6 (6.0)	3300 (227)
GMAX II 5900 Lo-Boy Premium Convertible* w/Electric Motor Kit (Non CSA)	248890	0.043	1.6 (6.0)	3300 (227)

NOTE: Electric Motor Max Tip is .031 and Max GPM (LPM) is 1.1 (4.2)

All units include: New Contractor Gun, 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Hose, RAC X 517 Tip and Guard, Whip Hose. *Premium units include: AutoClean2, Digital Display and Toolbox.



Exclusive Endurance Advantage Program eliminates downtime.



Change from gas to electric in seconds without any tools.



Exclusive ProConnect System – no-tools removal and installation for fast repairs on the job.





GMAX II 7900 Lo-Boy Standard 248700 0.048 2.2 (8.3) 3300 (227) 0.048 GMAX II 7900 Lo-Boy Premium* 248702 2.2 (8.3) 3300 (227) 0.048 GMAX II 7900 Hi-Boy Standard 248701 2.2 (8.3) 3300 (227) GMAX II 7900 Hi-Boy Premium* 3300 (227) 248703 0.048 2.2 (8.3) GMAX II 7900 Hi-Boy Roof Rig^ 248953 0.048 2.2 (8.3) 3300 (227)

All units include: New Contractor Gun, 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Hose, RAC X 517 Tip and Guard, 1/4 in (6.4 mm) Whip Hose.

*Premium units include: AutoClean2, Digital Display and Toolbox. ^ Roof Rig includes: Heavy Duty Gun, 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Hose, 20 in (50 cm) Fixed Heavy Duty Extension, 1/4 in (6.4 mm) Whip Hose, Hose Swivel and (2) RAC X Tips and Guard.



Exclusive Endurance Advantage Program eliminates downtime.



SmartControl provides high quality spray pattern plus the WatchDog Pump Protection System.



Exclusive ProConnect System - no-tools removal and installation for fast repairs on the job.

The GMAX II 7900 sprayer is the most powerful sprayer for high production paint contractors doing large tract, commercial and new residential construction jobs – where uninterrupted spraying is expected.

Exclusive MaxLife Endurance Pump

- Exclusive MaxLife rod and sleeve delivers unmatched durability and life — Graco's best
- Exclusive ProConnect system allows quick change-out of pumps - no tools required
- QuikAccess Intake Valve to easily clean or clear debris

Honda Power

- 200 cc to deliver maximum performance
- Contractor preferred engine with Oil Alert

SmartControl Pressure Control

- Advanced microprocessor-based control delivers Graco's most consistent spray fan at all spraying pressures
- · WatchDog system automatically shuts the pump off when material runs out

Exclusive Advantage Drive System

- Time-tested drive system provides peace of mind
- Lifetime quarantee
- · Hardened helical gears are extremely quiet runnina
- · Auto adjust/alignment system

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess



Power, durability, and capability is what makes this Graco sprayer an IronMan. From its oversized engine to its rugged, heavy-duty frame, the IronMan is built with extreme ruggedness for the serious contractor.

Extreme-Duty MaxLife HD Pump

- Exclusive MaxLife sleeve and Chromex rod delivers unmatched durability and life
- Long pump design puts the intake in the material – resulting in consistent priming with even the thickest materials
- Oversized clearances ensure minimal pressure drop and increase performance

Increased Honda Power

- 200 cc Honda Engine is oversized for increased performance and long life
- Oil alert shuts the engine down when the oil level is low – saving you from a costly repair

Extreme-Duty Prime Valve

 Designed to hold up to high pressure dumps for the most extreme jobsite conditions

Extreme-Duty Drive

· Lifetime lubricated and guaranteed for life

Extreme-Duty Frame

 "Indy Car" style roll cage protects all critical sprayer components from extreme jobsite abuse on all surfaces

Flat-Proof Tires

- · Nails, screws, blades cannot flatten these tires
- Pneumatic tire performance

Crush-Proof Intake Screen

 Holds up to impacts which are common on the jobsite

Control Lock Theft Deterrent

- Allows the user to lock/disable the sprayer deters jobsite theft
- · Protects the controls from jobsite abuse



IronMan 500G



DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX GPM (LPM)	MAX PSI (BAR)
IronMan 500G	256790	0.043	1.6 (6.0)	3300 (227)

Includes: Silver Plus $^{\text{\tiny IM}}$ Gun, 1/4 in x 50 ft (6.4 mm x 15 m) & 3/8 in x 50 ft (9.5mm x 15 m) BlueMax II Hose, RAC X 527, RAC X 1231 Tip and Guard.



Control lock protects and locks controls



Extreme-duty roll cage frame with a build-in hose wrap



Crush-proof intake screen holds up to jobsite abuse

GH 130 Convertible

The GH 130 Convertible is the clear choice for entry level contractors who demand max power in a small package.

Exclusive Graco Endurance Pump

- Proven design and performance
- Exclusive chromex rod delivers excellent durability and life
- Exclusive QuikChange™ Pump System and QuikAccess Intake Valve eliminates down-time

Honda Power

- 120 cc to deliver maximum performance
- Contractor preferred engine with Oil Alert

High Efficiency Hydraulic Motor

- Faster, more responsive changeover
- High precision pressure control
- 100% O-ring sealed fittings prevents leaks
- Fewer moving parts for easier maintenance and longer life

High Capacity Cooling System

- Innovative hydraulic reservoir design
- Runs more than 20% cooler than competition
- No special hydraulic fluid needed (ISO 46)
- Cooling fins on reservoir deflect heat away from unit
- Easy-to-use drain plug

Convertible Power - Electric/Gas

- No-tools change out system is easy to use
- Self-tensioning belt for long life
- Quiet, indoor use not a problem
- 2.0 hp TEFC DC Motor delivers the power

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess



DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX GPM (LPM)	MAX PSI (BAR
GH 130 Convertible Complete	253957	0.037	1.3 (4.9)	3300 (227)
GH 130 Convertible Complete w/Electric Motor Kit (non CSA)	253959	0.037	1.3 (4.9)	3300 (227)
GH 130 Convertible Complete w/CSA Electric Motor Kit	253980	0.037	1.3 (4.9)	3300 (227)

NOTE: Electric Motor Max Tip is .031 and Max GPM (LPM) is 1.1 (4.2)

All units include: New Contractor Gun, 1/4 in x 50 ft (9.5 mm x 15 m) BlueMax II Hose, RAC X 517 Tip and Guard, Whip Hose.



Convertability allows easy switching from gas to electric in seconds.



Exclusive crush-proof rock catcher provides unmatched pump protection. (patent pending)



Graco hydraulic power – a proven workhorse for long-life and reliability.

The GH 200 Convertible is the solution for medium to large jobs where proven hydraulic power is demanded to get the job done whether inside or outside.

Exclusive MaxLife Endurance Pump

- Exclusive MaxLife rod and sleeve delivers unmatched durability and life – Graco's best
- Exclusive ProConnect system allows quick change-out of pumps – no tools required
- QuikAccess intake valve to easily clean or clear debris

Honda Power

- 160 cc to deliver maximum performance
- · Contractor preferred engine with Oil Alert

High Efficiency Hydraulic Motor

- Faster, more responsive changeover
- High precision pressure control
- 100% 0-ring sealed fittings prevents leaks
- Fewer moving parts for easier maintenance and longer life

High Capacity Cooling System

- Innovative hydraulic reservoir design
- Runs more than 20% cooler than competition
- No special hydraulic fluid needed (ISO 46)
- Cooling fins on reservoir deflect heat away from unit
- · Easy-to-use drain plug

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess



GH 200 Convertible



DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX GPM (LPM)	MAX PSI (BAR)
GH 200 Convertible Complete	253962	0.047	2.15 (8.14)	3300 (227)
GH 200 Convertible Complete w/Electric Motor Kit (non CSA)	253963	0.047	2.15 (8.14)	3300 (227)
GH 200 Convertible Complete w/CSA Electric Motor Kit	253981	0.047	2.15 (8.14)	3300 (227)

NOTE: Electric Motor Max Tip is .031 and Max GPM (LPM) is 1.1 (4.2)

All units include: Silver Plus Airless Gun, 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Hose, RAC X 517 Tip and Guard, Whip Hose,



Convertability allows no-tool gas or electric power in seconds.



Exclusive crush-proof rock catcher provides unmatched pump protection. (patent pending)



Exclusive ProConnect System, no-tools pump removal and installation in seconds.

GH 230 Convertible & GH 300



DESCRIPTION	PART NUMBER	MAX TIP SIZE	MAX GPM (LPM)	MAX PSI (BAR)
GH 230 Convertible Complete	253965	0.053	2.35 (8.9)	3300 (227)
GH 230 Convertible Complete w/Electric Motor Kit (non CSA)	253966	0.053	2.35 (8.9)	3300 (227)
GH 230 Convertible Complete w/CSA Electric Motor Kit	253982	0.053	2.35 (8.9)	3300 (227)
GH 300 Complete	253968	0.057	3.0 (11.4)	3300 (227)

NOTE: Electric Motor Max Tip is .031 and Max GPM (LPM) is 1.1 (4.2)
All units include: Silver Plus Gun, 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Hose, RAC X 517 Tip and Guard, Whip Hose.



Convertability allows easy switching from gas to electric in seconds.



Exclusive crush-proof rock catcher provides unmatched pump protection. (patent pending)



Exclusive ProConnect System, no-tools pump removal and installation.

The GH 230 & 300 are two of the most powerful hydraulic sprayers for high production contractors who are spraying a wide range of materials including latex, elastomerics to block fillers on large commercial jobs.

Exclusive MaxLife Endurance Pump

- Exclusive MaxLife rod and sleeve delivers unmatched durability and life Graco's best
- Exclusive ProConnect system allows quick change-out of pumps – no tools required
- QuikAccess intake valve to easily clean or clear debris

Honda Power

- Delivers maximum performance
- · Contractor preferred engine with Oil Alert

High Efficiency Hydraulic Motor

- Faster, more responsive changeover
- High precision pressure control
- 100% O-ring sealed fittings prevents leaks
- Fewer moving parts for easier maintenance and longer life

High Capacity Cooling System

- Innovative hydraulic reservoir design
- Runs more than 20% cooler than competition
- No special hydraulic fluid needed (ISO 46)
- Cooling fins on reservoir deflect heat away from unit
- Easy-to-use drain plug

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess



PRO CONNECT

The industry's first and only no-tools pump removal and installation system. ProConnect allows you to remove and replace your pump in seconds without ANY tools, saving you time and money on the job.

Combine ProConnect with Graco's Endurance Advantage Program and you now have the ability to stay spraying, preventing costly downtime. No one else comes close! Experience the power of ProConnect today.



ProConnect system CLOSED with pump in.



ProConnect system OPEN with pump in.




ProConnect system **OPEN** without pump in.

GMAX II and GH ProConnect System





You can find the exclusive ProConnect System on these Graco sprayers!

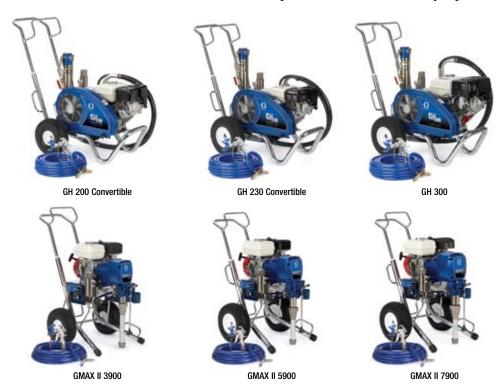

GH 833

PART NUMBER MAX TIP SIZE MAX PSI (BAR) DESCRIPTION MAX GPM (LPM) 4000 (276) GH 833 Bare (390 cc) 249318 0.065 249617 0.065 4000 (276) GH 833 Complete* GH 833 OEM (Hydraulic Motor & Displacement pump only) 249767 0.065 4.0 (15.1) 4000 (276) GH 833 Direct Immersion Kit 287843 0.065 4000 (276)

*Complete units include: Silver Plus Gun, 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II HP 4000 psi (276 bar) Hose, RAC X 655 Tip and Guard, 1/4 in x 3 ft, 4000 psi (276 bar) Whip Hose.



Bare Unit Shown

Exclusive QuikChange Pump System and QuikAccess Intake Valve eliminates down-time.



Direct Immersion Kit allows ultimate flexibility with tough-to-spray materials.



5-gallon direct immersion for the heaviest, most difficult coatings.

The gas hydraulic unit that can spray it all – the GH 833 "Big Rig". The GH 833 is the answer for high production professional contractors who demand uninterrupted performance with the widest range of materials.

Exclusive MaxLife Endurance Pump

- Proven design and performance
- Exclusive MaxLife rod and sleeve delivers unmatched durability and life Graco's best
- Exclusive QuikChange Pump System and QuikAccess Intake Valve eliminates down-time
- Only 16 cycles per gallon

Honda Power

- 390 cc to deliver maximum performance
- · Contractor preferred engine with Oil Alert

Heavy Duty Graco Hydraulic System

- Faster, more responsive changeover
- 0-ring sealed for fewer leaks
- High-precision pressure control
- No hydraulic reset button needed
- Durable hydraulic lines for long life

Heavy Duty Cooling System

- Large 4-gallon hydraulic reservoir
- Large durable return line hydraulic filter extends life
- No special hydraulic fluid needed
- Proven cooler and blower system
- Easy-to-use drain plug

Heavy Duty Frame

- Multi-function design converts to skid mount in seconds
- Enamel painted steel tubing corrosion protection
- · Easy-roll tubed pneumatic tires

Easy Out Pump Filter

- Filtering reduces tip clogs and ensures a quality finish
- Easy Out design filters from the inside out so filters won't get stuck or collapse when dirty
- Filter removes with the cap for less mess

Additional Features

- Lockable pressure control knob
- Grounding wire for safety with solvent materials
- Huge 1.5 inch diameter siphon hose
- Huge 1 inch porting on displacement pump

Only Graco offers the flexibility
and reliability needed
to complete the toughest
jobs with the widest
range of materials.
When the temperature
drops or when materials
are more difficult to spray,
turn to the GH 833
Direct Immersion Kit.
In a matter of minutes you
can convert your GH 833 into
a direct immersion workhorse
unit. Now you can spray it all —



only with Graco.

GH 833 Direct Immersion Kit



Application Chart															, la	A SOUTH	.% .%	n de la company	,	'Mered			, was	No. of the last of			
GRACO SPRAYER	(alle,	Prince and	Blou	Eng. Allers	Electric de la company de la c	Acris Merics	too, Wale	Pow Finish Solven	Contract St. Mass.	So, to to	Seathan	(4) Sep. (4)	Varies .	Bridge	Asy Wille	Mac Time	Was Age Mon. Mon.	Cont nooffing the thing	1904 19 10 10 10 10 10 10 10 10 10 10 10 10 10	The the and	Burner Smerk file	Maries Other Fine / 1	All All	Elac min F.	Enul Anice	Top Ding 1989 100 1	
GMAX II 7900 RR	•	•	•	•	•	•	•	•	•	•	•	•	•										•	•	•		
GH 733	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•			•	•	•		
GH 833	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•		•	•	•		Sprayable Coatings
GH 1015	•	•					•	•	•	•	•	•	•		•							•	•		•		Architechtural Protective
GH 2075	•	•				•	•	•	•	•	•	•	•		•				•			•	•		•		Industrial
GH 2560	•	•	•	•	•	•	•	•	•	•	•	•	•		•				•			•	•		•		Other: Roofing
GH 3640	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•		
GH 5030	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•		
*Note: Materials and temperatures may dictate the hose length you can use.																											

GH 733 & Roof Rigs



Bare Unit Shown

PART NUMBER	MAX GPM (LPM)	MAX PSI (BAR)
231733	3.0 (11.4)	3500 (241)
230975	3.0 (11.4)	3500 (241)
965165	15.0 (56.7)	1000 (70)
965171	7.5 (12.4)	1800 (124)
965168	6.0 (22.7)	2400 (166)
687327	3.8 (14.4)	3600 (245)
687100	2.8 (10.5)	4900 (337)
	231733 230975 965165 965171 965168 687327	231733 3.0 (11.4) 230975 3.0 (11.4) 965165 15.0 (56.7) 965171 7.5 (12.4) 965168 6.0 (22.7) 687327 3.8 (14.4)

*Complete units include: Silver Plus Gun, 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II HP 4000 psi (276 bar) Hose, RAC X 517 Tip and Guard, 1/4 in x 3 ft. 4000 psi (276 bar) Whip Hose.



Graco Hydraulic System – a proven workhorse for long-life and reliability.



6 interchangeable pumps allows maximum versatility for all applications.



No job is too big for the GH 733 Roof Rig. $\,$

For more than 20 years contractors have turned to the GH 733 & Roof Rigs when they need to spray some of the most aggressive materials found today.

The GH 733 & Roof Rigs are simply some of the most powerful and versatile units in the market.

Exclusive Xtreme™ Pump

- QuikChange pump section
- Time tested durability and performance
- Long life XtremeSeals[™] and leather packings
- · Heavy duty piston rod for long life
- QuikAccess intake valve removes easily for fast repairs

Kohler[©] Power

- Reliable electric start system
- 624 cc to deliver maximum power
- Air-cooled twin cylinder keeps heat away
- Time-tested power source

Heavy Duty Graco Hydraulic System

- Faster, more responsive changeover
- 0-ring sealed for fewer leaks
- Motor reset button to correct stalling
- Easy-to-service design
- Durable large hydraulic lines for long life

Heavy Duty Cooling System

- Large 5-gallon hydraulic reservoir
- · Large return line hydraulic filter
- No special hydraulic fluid needed
- Proven cooler and blower system
- Easy-to-use hydraulic drain plug

Heavy Duty Frame

- Field proven design withstands abuse
- 2-inch diameter steel tubing
- Tall, easy to roll transport tires
- Ergonomic design is easy to service

Additional Features

- Lockable pressure control knob
- Grounding wire for safty with solvent materials
- Durable bypass valve
- Adjustable intake ball travel system and interchangeable displacement pumps for a wide variety of spray applications



Purchase any Graco Gas

Sprayer and you can purchase
an Endurance Pump for
up to 80% off list price. Keep
a spare pump on hand to save
yourself time and money
on every job.

If you'd rather repack
your own pump, we'll let you
choose a free Repair Kit
instead. With reliability you
can count on, Graco ensures
you'll always be up and
spraying! Follow
the registration
instructions
included with
your sprayer.

Warranty

* Lifetime Electric Motor Warranty

If the Motor fails from normal use, we'll replace it under warranty for the original owner for the life of the sprayer.

Lifetime Drive Warranty

If the Drive Train fails from normal use, we'll replace it under warranty for the original owner for the life of the sprayer.

*3-Year Warranty

Coverage against defects in materials and workmanship on the entire sprayer.

*30-Day "Just Add Paint" Replacement Guarantee

Dissatisfied? Simply return the sprayer to the place you bought it within 30 days. They'll either exchange it for an identical sprayer or you can trade up to a larger sprayer at an extra cost.

* Downtime Eliminator Program

Part needed for a warranty repair not in stock at your distributor? Get FREE next business day air freight delivery when distributor orders the part by 2 p.m. CST.



ProConnect no-tools pump removal and installation system makes Endurance Pump swap out fast and easy.

Endurance Pump



Downtime Costs You Money

- Inconvenient Turnaround Time
- Unplanned and Expensive Rental Expenses
- Inconvenient and Costly Service Center Trips
- Lost Hours and Dollars in Idle Manpower

Our Commitment To Productivity

- Exclusive ProConnect System
- Exclusive QuikChange Lower
- · Quick Replacement
- No Special Tools Required
- You are Up and Spraying in Minutes, Not Days

* North American only. See local Graco distributors for Country specifics.

For GMAX II & GH 130 - 300

RAC X TIPS AND GUARDS





LTX-XXX

WR-XXXX

246215 246437 RAC® X SwitchTips, Blue (Odd #)

It has the longest lasting fan pattern on the market. Max Working Pressure: 4050 psi (279 bar, 27.9 MPa)

RAC X WideRAC® SwitchTips, Blue (Odd #)

24 in (610 mm) spray fan for maximum coverage. Max Working Pressure: 4050 psi (279 bar, 27.9 MPa)

RAC X HandTite Guard — 7/8 in (22 mm) thread size, standard Graco thread

RAC X HandTite Guard — 11/16 in (17 mm) thread size, older style Graco Pole Guns,

fits competitive guns with 11/16 in threads

RAC 5 TIPS AND GUARDS





286-XXX

243161

243263

RAC 5 SwitchTips, Black (Odd #)

Ideal for residential, commercial and industrial jobs. MWP: 4050 psi (279 bar, 27.9 MPa)

RAC 5 HandTite Guard — 7/8 in (22 mm) thread size, standard Graco thread

RAC 5 HandTite Guard — 11/16 in (17 mm) thread size, older style Graco Pole Guns,

fits competitive guns with 11/16 in threads

NEW CONTRACTOR & FTX GUNS





288429 288431

288488

Maximum Working Pressure: 3600 psi (248 bar, 24.8 MPa)

Contractor Gun (2-finger) with RAC X 517 SwitchTip and Guard Contractor Gun (4-finger) with RAC X 517 SwitchTip and Guard

Contractor Gun (2-finger) with RAC 5 517 SwitchTip

FTx™ Gun (4-finger) with RAC X 515 SwitchTip and Guard

FTx Gun (2-finger) with RAC X 515 SwitchTip and Guard

FTx Gun (4-finger) with RAC 5 515 SwitchTip

Gun Repair Kit

SILVER PLUS GUN



246240

243283 235460

235461 235462

235474

Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)

Silver Plus Gun (2-finger) with RAC X 517 SwitchTip and Guard Silver Plus Gun (2-finger) with RAC 5 517 SwitchTip and Guard

Silver Plus Gun (2-finger) with Flat Tip Guard

Silver Plus Gun (4-finger) with Flat Tip Guard

Silver Plus Gun Fine Finish (2-finger) with Flat Tip Guard

Repair Kit

HEAVY DUTY GUN



241705

237260

Maximum Working Pressure: 4000 psi (276 bar, 276 MPa) — Fluid Orifice Diameter: 0.125 in (3.2 mm)

Heavy Duty Gun with RAC X 531 Spray Tip and Tip Guard

Ideal for high solids, mastics, protective coatings and smooth textures

Repair Kit

For GMAX II & GH 130 - 300

GUN HOSE KITS



288489 288490 288493

287095 287041 287042 Includes the following unless otherwise noted: Airless Gun, RAC X 517 SwitchTip and Guard, 1/4 in x 50 ft (6.4 mm x 15 m) 3300 psi (227 bar) BlueMax™ II Airless Hose and 3 ft (0.9 m) Whip Hose

Contractor Gun Hose Kit

Contractor Gun Hose Kit - 3/8 in x 50 ft (9.5 mm x 15 m) Airless Hose

FTx Gun Hose Kit - 515 Tip

Flex Plus Gun Hose Kit

Silver Plus Gun Hose Kit

Silver Plus Gun Hose Kit — 3/8 in x 50 ft (9.5 mm x 15 m) Airless Hose

BLUEMAX II AIRLESS HOSE



238358 238959 238359

Feel the Difference in flexibility!

3/16 in x 3 ft (4.8 mm x 0.9 m) BlueMax II 3300 psi Airless Whip Hose 3/16 in x 4.5 ft (4.8 mm x 1.4 m) BlueMax II 3300 psi Airless Whip Hose 3/16 in x 6 ft (4.8 mm x 1.8 m) BlueMax II 3300 psi Airless Whip Hose 1/4 in x 25 ft (6.4 mm x 7.5 m) BlueMax II 3300 psi Airless Hose 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II 3300 psi Airless Hose 3/8 in x 25 ft (9.5 mm x 7.5 m) BlueMax II 3300 psi Airless Hose 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II 3300 psi Airless Hose

BLUEMAX II HIGH PRESSURE HOSE



277250 277351

277251 277253

4000 psi WPR

1/4 in x 3 ft (6.4 mm x 0.9 m) MxF Whip Hose 1/4 in x 50 ft (6.4 mm x 15 m) FBE 3/8 in x 3 ft (9.5 mm x 0.9 m) MxF Whip Hose 3/8 in x 50 ft (9.5 mm x 15 m) FBE 1/2 in x 50 ft (13 mm x 15 m) FBE

POLE GUNS



287023 287024 MWP: 3600 psi (248 bar, 24.8 MPa)

3 ft (.9 m) Pole Gun with RAC X SwitchTip 517 System 6 ft (1.8 m) Pole Gun with RAC X SwitchTip 517 System

EXTENSIONS



287019 287020

287021 287022 10 in (25 cm)

KITS

RAC X Tip Extensions - Maximum WPR: 4050 psi, (280 bar, 28.0 MPa)

Includes: RAC X HandTite Guard Standard with 7/8 in (22 mm) Gun Nut and OneSeal

15 in (38 cm)

20 in (50 cm)

30 in (75 cm)

55 gallon Siphon Kit, 1.25 in diameter x 6 ft Siphon Hose, for GMAX II 3900/5900/7900

55 gallon Siphon Kit, 1.25 in diameter x 6 ft Siphon Hose, for GMax 7900, HydraMax 225 - old style

55 gallon Siphon Kit, 1.25 in diameter x 6 ft Siphon Hose, for 3900/5900 - old style GMax

30 gallon Siphon Kit, 1.25 in diameter x 6 ft Siphon Hose, for 3900/5900 - old style GMax

55 gallon Siphon Kit, 1.25 in diameter x 6 ft Siphon Hose, for HydraMax 300/350

For GH 733 & GH 833

AIRLESS GUNS & GUN HOSE KITS

246240

287850

287851

246215

246437

277251



Silver Plus Gun (2-Finger) with RAC X 517 SwitchTip and Guard

241705 Heavy Duty Gun with RAC X 531 SwitchTip and Guard 224472 Mastic Gun 5000 psi (345 bar) with 36 in (.9 m) extension

Silver Plus Gun Hose Kit with RAC X SwitchTip, 3/8 in (9.5 mm) x 50 ft (15 m) 3300 psi (227 bar) Hose

Flex Plus Gun Hose Kit with RAC X 655 and 531 SwitchTip, 3/8 in (9.5 mm) x 50 ft (15 m)

4000 psi (276 bar) Hose and Whip Hose

Heavy Duty Gun Hose Kit with RAC X 655 and 531 SwitchTip, 3/8 in (9.5 mm) x 50 ft (15 m) 287852

4000 psi (276 bar) Hose

189018 Gun Swivel rated to 5600 psi (386 bar, 38.6 MPa)

RAC X TIPS AND GUARDS





LTXxxx RAC X SwitchTips, Blue (Odd #)

Ideal for residential, commercial and industrial jobs. MWP: 4050 psi (280 bar, 28.0 MPa)

RAC X HandTite™ Tip Guard — 7/8 in (22 mm) thread size RAC X HandTite Tip Guard — 11/16 in (17.5 mm) thread size

RAC 5 TIPS AND GUARDS





RAC 5 SwitchTips, Black (Odd #) 286xxx

Ideal for residential, commercial and industrial jobs. MWP: 4050 psi (279 bar, 27.9 MPa)

Synthetic-braided, 4000 psi (276 bar, 27.6 MPa) maximum working pressure rated at 180° F (82.2° C)

243161 RAC 5 HandTite Guard — 7/8 in (22 mm) thread size RAC 5 HandTite Guard — 11/16 in (17.5 mm) thread size 243263

BLUEMAX II HIGH PRESSURE HOSE



1/4 in x 3 ft (6.4 mm x 0.9 m) MxF Whip Hose 277249 277250 1/4 in x 50 ft (6.4 mm x 15 m) FBE

3/8 in x 3 ft (9.5 mm x 0.9 m) MxF Whip Hose 277351 277253

3/8 in x 50 ft (9.5 mm x 15 m) FBE

1/2 in x 50 ft (13 mm x 15 m) FBE

For GH 733 & GH 833

GH 733 & GH 833 KITS

287843	Direct Immersion Kit — includes: Hydraulic Feed Lines, Stinger Tube and Lift Bracket
249767	OEM Kit — includes: Hydraulic Motor/Head, Displacement Pump
287916	Non-Solvent Siphon Kit, 1.5 in diameter x 6.5 ft Siphon Hose
287936	Non-Solvent Siphon Kit, 2 in diameter x 6.5 ft Siphon Hose
287915	Solvent Resistant Siphon Kit, 1.5 in diameter x 6.5 ft Siphon Hose
948727	2 in (50 mm) Siphon Kit adapts to any GH 733, Bulldog® or King® Pump air or gas
948740	Lift Kit modifies GH 733 with version code A, B or C to accept GH 1015, GH 2075 or GH 2560 pump lowers
245244	Lift Kit modifies GH 733 with version code A, B or C to accept Xtreme pump lower kits
	(GH 733, GH 3640 and GH 5030 pump kits)

FITTINGS

156971	1/4 in npt x 1/4 in npt (6.4 mm x 6.4 mm) – MBE Maximum Working Pressure: 7500 psi (517 bar, 51.7 MPa)
156849	3/8 in npt x 3/8 in npt (9.5 mm x 9.5 mm) – MBE Maximum Working Pressure: 6000 psi (420 bar, 42.0 MPa)
158491	1/2 in npt x 1/2 in npt (13 mm x 13 mm) – MBE Maximum Working Pressure: 6700 psi (462 bar, 46.2 MPa)
155865	1/2 in npt x 1/2 in npsm (13 mm x 13 mm) – FBE Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
157350	1/4 in npt x 3/8 in npt (6.4 mm x 9.5 mm) – MBE Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
159239	1/2 in npt x 3/8 in npt (13 mm x 9.5 mm) – MBE Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
15H338	1.0 in npt x 3/8 in npt (25.4 mm x 9.5 mm) – MBE Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)

UNIONS

	156823	1/4 in npt(m) x 1/4 in npsm(t) (6.4 mm x 6.4 mm) Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
	155665	3/8 in npt(m) x 3/8 in npsm(f) (9.5 mm x 9.5 mm) Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
	157705	1/4 in npt(m) x 3/8 in npsm(f) (6.4 mm x 9.5 mm) Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
	155570	1/4 in npt(f) x 1/4 in npsm(f) (6.4 mm x 9.5 mm) Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)
1	159153	3/8 in npt(f) x 1/4 in npsm(f) (9.5 mm x 6.4 mm) Maximum Working Pressure: 5000 psi (345 bar, 34.5 MPa)

Gas Product Specifications



GMAX 3400

Max Tip: .027 Max psi/bar: 3300/227 Max gpm/lpm: .75/2.8 Engine: 120 cc Honda Weight lbs/kg: 89/40.4 **Gun Support:**

(1) Gun with .027

Gun:

Contractor Airless Gun

Hose:

• 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II 3300 psi (227 bar)

Tin:

• RAC X 517 Tip and Guard

Inlet Strainer:

Part #246385

Pump Filter:

 Includes Easy Out Pump Filter

Easy Out Filter Screens:

• 30 Mesh - 244071

• 60 Mesh - 244067

• 100 Mesh - 244068

• 200 Mesh - 244069

Sprayer Dimensions:

• 31 (79) x 22.5 (58) x 31.5 (80)

Wear Parts:

Packing Kit - 244194

• Chromex Rod - 249125

• Cylinder - 243176

• Intake Valve - 246429 Piston Valve - 239937

Complete Pump Lower:

• Part #246428

• Instruction - 310802

• Repair - 310813



GMAX II 3900

Max Tip: .036 Max psi/bar: 3300/227 Max gpm/lpm: 1.25/4.7

Engine: 120 cc Honda Weight lbs/kg: 109/50 **Gun Support:**

> (1) Gun with .036 (2) Guns with 023

Contractor Airless Gun

• 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II 3300 psi (227 bar)

• RAC X 517 Tip and Guard

Inlet Strainer

Part #189920

Pump Filter:

• Includes Easy Out Pump Filter

Easy Out Filter Screens:

• 30 Mesh - 244071

• 60 Mesh - 244067

• 100 Mesh - 244068

• 200 Mesh - 244069

Sprayer Dimensions:

• 32 (81) x 22.25 (56.5) x 31.5 (80)

Wear Parts:

Packing Kit - 248212

Chromex Rod - 248206

• Cylinder - 287551

• Sleeve - 248209

Piston Valve - 239937

• Intake Valve - 246429

 30/55 Gallon Siphon Kit - 287541

Complete Pump Lower:

• Part #287512

Manuals:

Instruction - 310892

Repair - 310893



GMAX II 5900

Max Tip: .043 Max psi/bar: 3300/227 Max gpm/lpm: 1.6/6.0 Engine: 160 cc Honda

Weight lbs/kg: 139/64 **Gun Support:**

(1) Gun with .043 (2) Guns with 029 (3) Guns with 023

Contractor Airless Gun

• 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II 3300 psi (227 bar)

Tip:

• RAC X 517 Tip and Guard

Inlet Strainer:

Part #189920

Pump Filter:

· Includes Easy Out

Pump Filter

Easy Out Filter Screens:

• 30 Mesh - 244071

• 60 Mesh - 244067

• 100 Mesh - 244068 • 200 Mesh - 244069

Sprayer Dimensions:

• 32.25 (81.9) x 24.5 (62) x 32.25 (82)

• Packing Kit - 248213

• Chromex Rod - 248207

• Cylinder - 287552

Sleeve - 248210

• Piston Valve - 240150

• Intake Valve - 244199

 30/55 Gallon Siphon Kit - 287541

Complete Pump Lower:

Part #287513

5000HD #287570

Manuale

Instruction - 310892

Renair - 310893



GMAX II 5900 Convertible

Max Tip: .043

Max psi/bar: 3300/227 Max gpm/lpm: 1.6/6.0 Engine: 160 cc Honda

Weight lbs/kg: 146/67 Electric Max Tip: .031

Electric Max Gpm/Lpm: 1.1/4.2 Gun Support: (Gas)

(1) Gun with .043

(2) Guns with 029

(3) Guns with 023

Gun Support: (Electric)

(1) Gun with .031

(2) Guns with .017

· Contractor Airless Gun

Hose:

• 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II 3300 psi (227 bar)

• RAC X 517 Tip and Guard

Inlet Strainer:

Part #189920

Pump Filter:

Includes Easy Out

Pump Filter **Easy Out Filter Screens:**

• 30 Mesh - 244071

• 60 Mesh - 244067

• 100 Mesh - 244068

• 200 Mesh - 244069

Sprayer Dimensions:

• 32.25 (81.9) x 24.5 (62) x 32.25 (82)

Wear Parts:

Packing Kit - 248213

Chromex Rod - 248207

• Cylinder - 287552 • Sleeve - 248210

Intake Valve - 244199

 Piston Valve - 240150 • 30/55 Gallon Siphon Kit - 287541

Complete Pump Lower:

Part #287513

Manuals:

Instruction - 310892

• Repair - 311046



GMAX II 7900

Max Tip: .048 Max psi/bar: 3300/227 Max gpm/lpm: 2.2/8.3

Engine: 200 cc Honda Weight lbs/kg: 146/67

Gun Support: (1) Gun with .048

(2) Guns with .035

(3) Guns with 027

(4) Guns with .023

· Contractor Airless Gun

(9.5 mm x 15 m) BlueMax II 3300 psi (227 bar)

• RAC X 517 Tip and Guard

• 3/8 in x 50 ft

Inlet Strainer:

Part #189920

Pump Filter: Includes Easy Out

Pump Filter

Easy Out Filter Screens:

• 30 Mesh - 244071

• 60 Mesh - 244067 • 100 Mesh - 244068

• 200 Mesh - 244069

Sprayer Dimensions: • 33 (83.8) x 24.5 (62) x

32.25 (82)

Wear Parts:

• Packing Kit - 249123

• MaxLife Rod - 249119 • Cylinder - 249139

 MaxLife Sleeve - 249121 • Intake Valve - 240918

• Piston Valve - 249177 30/55 Gallon

Siphon Kit - 287541 **Complete Pump Lower:**

Part #249122

Manuale

Instruction - 310892

Renair - 310893



IronMan 500G

Max Tip: .043 Max psi/bar: 3300/227

Max gpm/lpm: 1.6/6.0 Engine: 200 cc Honda

Weight lbs/kg: 168/76 Gun Support: (Gas)

> (1) Gun with .043 (2) Guns with .029

(3) Guns with .023

Gun: Silver Plus Airless

Hose: • 1/4 in x 50 ft (6.4 mm x 15 m)

BlueMax II 3300 psi (227 bar) 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II 3300 psi (227 bar)

Tip:

• RAC X 527 Tip and Guard

• RAC X WideRAC 1231

Inlet Strainer:

• Part #257033

Pump Filter:

Includes Easy Out Pump Filter

Easy Out Filter Screens: • 30 Mesh - 244071

> • 60 Mesh - 244067 • 100 Mesh - 244068

200 Mesh - 244069 Sprayer Dimensions:

• 33 (84) x 25 (63) x 38.5 (98) **Wear Parts:**

> Packing Kit - 248213 Chromex Rod - 249028

 Cylinder - 196754 Sleeve - 257031

• Intake Valve - 196753

• Piston Valve - 240150 • 30/55 Gallon

Siphon Kit 257353 **Complete Pump**

• Part #257146

Lower:

• Instruction/Repair - 313313

Gas Product Specifications



GH 130 Convertible

Max Tip: .037 Max psi/bar: 3300/227 Max gpm/lpm: 1.3/4.9 Engine: 120 cc Honda Weight lbs/kg: 150/68 Electric Max Tip: .031 Electric Max Gpm/Lpm: 1.1/4.2 **Gun Support:**

(1) Gun with .037

Electric:(1) Gun 031

Gun:

 Contractor Airless Gun

• 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II 3300 psi (227 bar)

RAC X 517 Tip and Guard

Crush Proof Strainer:

Part #288472

Pump Filter:

 Includes Easy Out Pump Filter

Easy Out Filter Screens:

- 30 Mesh 244071
- 60 Mesh 244067
- 100 Mesh 244068
- 200 Mesh 244069

Sprayer Dimensions:

• 41 (104.1) x 24 (61) x 30 (76.2)

Wear Parts:

- Packing Kit 288471
- Chromex Rod 288479
- Cylinder 243347
- Chromex Sleeve 248210
- Intake Valve 244199
 - Piston Valve 240150
 - 30/55 Gallon Siphon Kit -287541

Complete Pump Lower:

Part #288466

Manuals:

- Instruction 311791
- Repair 311797



GH 200 Convertible

Max Tin: 047 Max psi/bar: 3300/227 Max gpm/lpm: 2.15/8.14 Engine: 160 cc Honda

Weight lbs/kg: 160/72 Electric Max Tip: .031

Electric Max Gpm/Lpm: 1.1/4.2 Gun Support:

- (1) Gun with 047
- (2) Guns with 034 (3) Guns with 027
- (4) Guns with .023

Electric:

- (1) Gun with .031
- (2) Guns with .017

Gun:

· Silver Plus Airless Gun

Hose:

• 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II 3300 psi (227 bar)

RAC X 517 Tip and Guard

Crush Proof Strainer:

Part #288472

Pump Filter:

. Includes Easy Out Pump Filter

Easy Out Filter Screens:

- 30 Mesh 244071
- 60 Mesh 244067
- 100 Mesh 244068
- 200 Mesh 244069

Sprayer Dimensions:

• 41 (104.1) x 24 (61) x 30 (76.2)

Wear Parts:

- Packing Kit 287813
- MaxLife Rod 288469
- Cylinder 245413
- MaxLife Sleeve 249121
- Intake Valve 240918
- Piston Valve 249177
- 30/55 Gallon Siphon Kit - 287541

Complete Pump Lower:

Part #288467

- Instruction 311791
- Repair 311797



GH 230 Convertible

Max Tip: .053 Max psi/bar: 3300/227 Max gpm/lpm: 2.35/8.9

Engine: 200 cc Honda Weight lbs/kg: 168/75.6 **Gun Support:**

- (1) Gun with .053
- (2) Guns with .038
- (3) Guns with .032
- (4) Guns with .028 (5) Guns with .024

Electric:

- (1) Gun with .031
- (2) Guns with .017

Gun:

· Silver Plus Airless Gun

• 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II 3300 psi (227 bar)

. BAC X 517 Tip and Guard

Crush Proof Strainer:

Part #288472

Pump Filter:

• Includes Easy Out Pump Filter

Easy Out Filter Screens:

- 30 Mesh 244071 • 60 Mesh - 244067
- 100 Mesh 244068
- 200 Mesh 244069

Sprayer Dimensions:

• 48 (121.9) x 24 (61) x 32 (81.3)

Wear Parts:

- Packing Kit 287813 • MaxLife Rod - 288470
- Cylinder 249532
- MaxLife Sleeve 287817
- Intake Valve 240918
- Piston Valve 249177 • 30/55 Gallon

Siphon Kit - 287541 **Complete Pump Lower:**

Part #288468

- Instruction 311791
- Repair 311797



GH 300

Max Tip: .057 Max psi/bar: 3300/227 Max gpm/lpm: 3.0/11.4 Engine: 270 cc Honda Weight lbs/kg: 195/87.8

- **Gun Support:**
 - (1) Gun with .057 (2) Guns with .039
 - (3) Guns with .033
 - (4) Guns with .029
 - (5) Guns with .025

(6) Guns with .023

· Silver Plus Airless Gun

• 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II 3300 psi (227 bar)

· RAC X 517 Tip and Guard

Crush Proof Strainer:

Part #288472

Pump Filter:

· Includes Easy Out Pump Filter

- **Easy Out Filter Screens:**
 - 30 Mesh 244071
 - 60 Mesh 244067
 - 100 Mesh 244068

200 Mesh - 244069 **Sprayer Dimensions:**

• 48 (121.9) x 24 (61) x 32 (81.3)

Wear Parts:

- Packing Kit 287813
- MaxLife Rod 288470
- Cylinder 249532
- Maxl ife Sleeve 287817 Intake Valve - 240918
- Piston Valve 249177

Siphon Kit - 287541 **Complete Pump Lower:**

Part #248468

• 30/55 Gallon

Manuals:

- Instruction 311791
- Repair 311797



GH 733 & Roof Rigs

Max Tip: .060 Max psi/bar: 3500/240 Max gpm/lpm: 3.0/11.4 Engine: 624 cc Kohler Weight lbs/kg: 480/217

· Silver Plus Airless Gun

• 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II HP 4000 psi

(276 bar)

· RAC X 517 Tip and Guard

Inlet Strainer:

• Part #237840

Sprayer Dimensions:

• 48.5 (123.1) x 29 (73.6)

x 50.5 (128.3)

- Wear Parts:
 - Packing Kit 244853
 - Rod 15J096
- Cylinder 197318 • Intake Valve - 197304

Piston Valve - 197312

Complete Pump Lowers

Part #I 250C1

- Manuals:
 - Instruction 307616

• Repair - 307616

- **Optional Roof Rigs** GH 1015 (965165)
 - 1000 psi/15.0 gpm
 - GH 2075 (965171)
 - 1800 psi/7.5 apm GH 2560 (965168)
 - 2400 psi/6.0 gpm GH 3640 (687327)
 - 3600 psi/3.8 gpm GH 5030 (687100) 4900 psi/2.8 apm

GH 833 Big Rig

Max Tip: .065

Max psi/bar: 4000/276

Max gpm/lpm: 4.0/15.1 Engine: 390 cc Honda

- Weight lbs/kg: 350/158 **Gun Support:**
 - (1) Gun with .065
 - (2) Guns with .046 (3) Guns with .037
 - (4) Guns with .032
- (5) Guns with .029

(6) Guns with .026

Gun: · Silver Plus Airless Gun

• 3/8 in x 50 ft (9.5 mm x 15 m)

Hose:

BlueMax II HP 4000 psi (276 bar)

· RAC X 655 Tip and Guard

Inlet Strainer: Part #237840

Pump Filter:

- · Includes Easy Out Pump Filter
- Easy Out Filter Screens:
 - 30 Mesh 244071 • 60 Mesh - 244067
- 100 Mesh 244068

• 200 Mesh - 244069 Sprayer Dimensions: • 40 (101.6) x 27 (68.5) x

47 (119.3)

- Wear Parts: • Packing Kit - 287835
 - MaxLife Rod 287832 • Cylinder - 287836
 - MaxLife Sleeve 287833 Intake Valve - 287838
 - Piston Valve 287837 Solvent Resistent Siphon Kit - 287915

Complete Pump Lower: Part #287834

Manuals: Instruction - 311279

- Repair 311280
 - 21



ABOUT GRACO

PROVEN QUALITY, LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441 Minneapolis, MN 55440-1441 Tel: 612-623-6000 Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters Graco Inc. 88-11th Avenue N.E. Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters Graco N.V. Industrieterrein-Oude Bunders Slakweidestraat 31 3630 Maasmechelen, Belgium Tel: 32 89 770 700

Tel: 32 89 770 700 Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd Suite 17 2 Enterprise Drive Bundoora Victoria 3083 Australia

Tel: 61 3 9467 8558 Fax: 61 3 9467 8559

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Room 118 1st Floor
No.2 Xin Yuan Building
No.509 Cao Bao Road
Shanghai, P.R. China 200233
Tel: 86 21 649 50088

Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd. India Liaison Office Room 103, Level 4, Augusta Point Golf Course Road Gurgaon, Haryana, India 122001 Tel: +91 124 435 4208 Fax: +91 124 435 4001

JAPAN

Graco K.K. 1-27-12 Hayabuchi Tsuzuki-ku Yokohama City, Japan 2240025 Tel: 81 45 593 7300 Fax: 81 45 593 7301

-ax: 81 45 593 *1*

KOREA
Graco Korea Inc.
Choheung Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-Si, Gyunggi-Do,
Korea 431-060
Tel: 82 31 476 9400
Fax: 82 31 476 9801

SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

800-690-2894 or visit us at www.graco.com.

Graco Inc. is registered to I.S. EN ISO 9001

North America Customer Service 800-690-2894 Fax 800-334-6955

©2008 Graco Inc. 337554 Rev. F 12/08 All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. Blue is a trademark of Graco Inc. for Contractor Equipment Sprayers.